





www.yafla.net

**YAFLA**<sup>®</sup>  
开关电源·专业制造商  
LED POWER SUPPLY

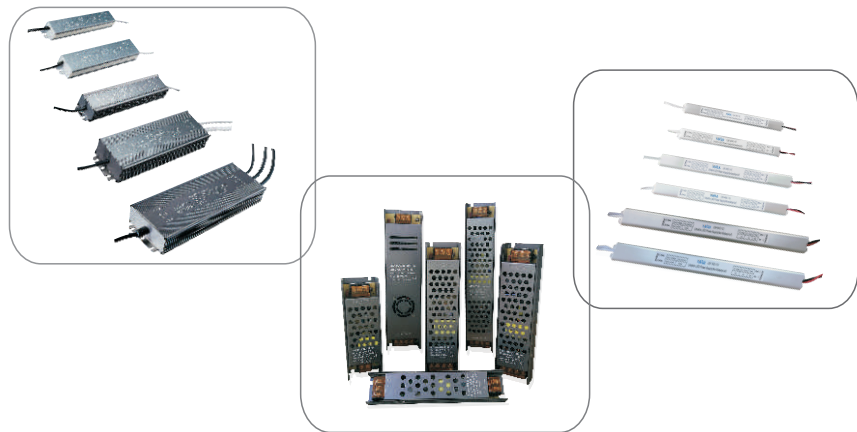

# 亚非拉电源 [www.yafla.net](http://www.yafla.net)



佛山亚非拉电子科技有限公司

地址:佛山市南海区狮山镇罗村下柏工业区  
松丰路10号之三(耀丰泰工业园)

电话:0086-0757-86408957

网址:www.yafla.net

**FO SHAN YAFA ELECTRONIC TECHNOLOGY CO.LTD**

ADD: No.10-3,Song Feng Road,Xia Bai Industrial Zone,Shi Shan Town,  
Nan Hai District,Fo Shan City,Guang Dong.

Tel:0086-0757-86408957

Web:www.yafla.net

佛山亚非拉电子科技有限公司  
FOSHAN YAFA ELECTRONIC TECHNOLOGY CO.LTD

**关于我们 About us**

**佛山亚非拉电子科技有限公司** 位于广东第三大城市, 中国近代明清的天下四聚之一佛山, 是一家集设计、研发、生产、和销售为一体的专业生产LED开关电源的厂家, 占地面积4000多平方米。产品适用于LED照明、广告标识、发光字、亮化工程、安防监控、机械设备、工控自动化、通讯和仪器仪表行业等各领域。销售网点遍布全球100多个国家和地区。年销售量高达300多万台。

我司拥有先进的高科技设备, 一流的专业设计精英, 丰富的生产经验, 庞大的生产规模, 产品种类繁多, 质量可靠, 经济实惠, 热烈欢迎国内外客户莅临指导, 共图发展, 铸就辉煌。

感谢广大客户和同行业朋友的鼎力支持! 更多详细信息, 欢迎登陆我司网站: [www.yafla.net](http://www.yafla.net)

**FOSHAN YAFLA ELECTRONIC TECHNOLOGY CO. LTD** is a professional and modern power supply manufacturer, specialized in researching, developing, manufacturing and selling varieties of ac to dc switching power supply. Our factory covers over 4000m<sup>2</sup>, with the annual capacity of 3,000,000 units. Its sales more than one hundred countries and regions, which enjoy good reputation in the field.

And all our power supplies have been approved by CE(EMC, LVD) and RoHS certificates. With their stable quality and environment protection. YAFLA power supplies are widely used in indoor&outdoor LED lighting LED strips, Advertising box, LED signage, Security equipment, monitors, etc.

Looking forward to working with you to create mutual benefits!

For information in details, please visit our website: [www.yafla.net](http://www.yafla.net)

**生产车间 Workshop**



第一生产线 The first production line    第二生产线 The second production line    第三生产线 The third production line    自动浸锡 Automatic immersion tin    自动插件机 Automatic plug-in machine



波峰焊 Wave soldering    QC检测 QC Inspection    装配产线 Assembly production line    老化测试 Aging test    漏电流测试仪 Leakage tester

**产品类型 Product type**

经典室内不防水电源、全灌封防水型电源(铝壳或塑胶壳)、(超薄)广告灯箱电源、迷你尺寸防水电源、电源适配器和(衣)柜灯电源。 Indoor nonwaterproof power supply, Waterproof power supply (Aluminum or Plastic housing), (Ultrathin) Advertising light box power supply, Mini size waterproof power supply, Power adapter, Cabinet lamp power supply.

**品质原则 Quality principle**

预防在先, 一次做好。 Lauding "do a good job for the first time, taking precautions first".

做最好的品质, 最优惠的价格, 最优良的服务。 To ensure "the best quality, the most favorable price, the best service".

提供最佳的电源解决方案, 依托优质的售后服务, 迅捷的交货。 With the best power solutions, relying on high-quality after-sales service, fast delivery.

**Indoor Nonwaterproof Power Supply 室内不防水电源**

- Features:  
 1. Constant voltage design, aluminum housing D series  
 2. Protections: Short Circuit/Over Load/Over Current  
 3. 100% full load burn-in test  
 4. High reliable quality

- 产品特点:  
 1. 恒压输出 铝壳D系列  
 2. 保护功能: 短路/过载/过流保护  
 3. 100%满载老化  
 4. 高可靠性, 长寿命



产品型号 Model No.	D-15	D-25	D-40	D-50	D-60
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12Vdc	12Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.25A	2.08A	3.3A/1.6A	4.16A/2.08A	5A/2.5A
输出功率 Output Power	15W	25W	40W	50W	60W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	80*47*22	80*47*22	84*58*38	84*58*38	84*58*38

产品型号 Model No.	D-80	D-100	D-120	D-150	D-180
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	6.66A/3.33A	8.33A/4.16A	10A/5A	12.5A/6.25A	15A/7.5A
输出功率 Output Power	80W	100W	120W	150W	180W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	110*78*35	110*78*35	159*98*38	159*98*38	198*98*42

产品型号 Model No.	D-200	D-250	D-350	D-400	D-500
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	16.6A/8.3A	20.83A/10.41A	25A/12.5A	33.3A/16.6A	41.6A/20.8A
输出功率 Output Power	200W	250W	350W	400W	500W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	198*98*42	200*110*50	200*110*50	200*110*50	260*102*65

**Advertising Light Box Power Supply 拉布/卡布灯箱电源**

- Features:
- 1.Constant voltage design,aluminum housing FU series
  - 2.Protections: Short Circuit/Over Load/Over Current
  - 3.100%full load burn-in test
  4. High reliable quality



- 产品特点:
- 1.恒压输出铝壳FU系列
  - 2.保护功能:短路/过载/过流保护
  - 3.100%满载老化
  - 4.高可靠性,长寿命




产品型号 Model No.	FU-60	FU-100	FU-150	FU-200	FU-250	FU-300
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	5A/2.5A	8.3A/4.16A	12.5A/6.25A	16.6A/8.3A	20.8A/10.4A	5A/2.5A
输出功率 Output Power	60W	100W	150W	200W	250W	300W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	170*53*22.5mm	196*53*22.5mm	252*53*22.5mm	308*53*22.5mm	308*53*22.5mm	308*53*22.5mm

**Narrow Case Power Supply 长条型电源**

- Features:
- 1.Constant voltage design,aluminum housing W series
  - 2.Protections: Short Circuit/Over Load/Over Current
  - 3.100%full load burn-in test
  4. High reliable quality



- 产品特点:
- 1.恒压输出铝壳W系列
  - 2.保护功能:短路/过载/过流保护
  - 3.100%满载老化
  - 4.高可靠性,长寿命

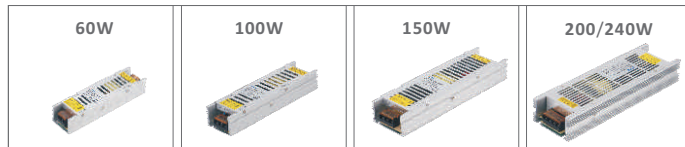

产品型号 Model No.	W-60	W-100	W-150	W-200	W-240
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	5A/2.5A	8.3A/4.16A	12.5A/6.25A	16.6A/8.3A	20A/10A
输出功率 Output Power	60W	100W	150W	200W	240W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	160*42*30	180*48*35	200*58*32	223*70*40	223*70*40

**Ultrathin Light Box Power Supply 超薄灯箱电源**

- Features:
- 1.Constant voltage design,aluminum housing LBC series
  - 2.Protections: Short Circuit/Over Load/Over Current
  - 3.100%full load burn-in test
  4. High reliable quality



- 产品特点:
- 1.恒压输出铝壳LBC系列
  - 2.保护功能:短路/过载/过流保护
  - 3.100%满载老化
  - 4.高可靠性,长寿命



产品型号 Model No.	LB-18C	LB-24C	LB-36C	LB-48C	LB-60C	LB-72C
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.5A/0.75A	2A/1A	3A/1.5A	4A/2A	5A/2.5A	6A/3A
输出功率 Output Power	18W	24W	36W	48W	60W	72W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	193*18*18	193*18*18	283*18*18	283*18*18	313*18*18	313*18*18

**Ultrathin Light Box Power Supply 超薄灯箱电源**

- Features:
- 1.Constant voltage design,aluminum housing LB series(**high quality**)
  - 2.Protections: Short Circuit/Over Load/Over Current
  - 3.100%full load burn-in test
  4. High reliable quality



- 产品特点:
- 1.恒压输出铝壳LB系列(**高品质**)
  - 2.保护功能:短路/过载/过流保护
  - 3.100%满载老化
  - 4.高可靠性,长寿命




产品型号 Model No.	LB-18	LB-24	LB-36	LB-48	LB-60	LB-72
输入电压 Input Voltage	90-265Vac	90-265Vac	90-265Vac	90-265Vac	90-265Vac	90-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.5A/0.75A	2A/1A	3A/1.5A	4A/2A	5A/2.5A	6A/3A
输出功率 Output Power	18W	24W	36W	48W	60W	72W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	173*18*18	268*18*18	288*18*18	288*18*18	323*20*22	323*20*22

Ultra Slim Nonwaterproof Power Supply 超薄不防水电源

- Features:  
 1.Constant voltage design,aluminum housing C-U series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality

- 产品特点:  
 1.恒压输出铝壳C-U系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命

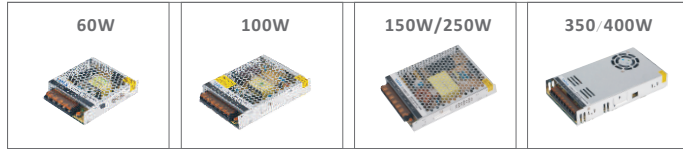

产品型号 Model No.	C-60U	C-100U	C-150U	C-250U	C-350U	C-400U
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	5A/2.5A	8.3A/4.16A	12.5A/6.25A	20.8A/10.4A	29A/14.6A	33.3A/16.6A
输出功率 Output Power	60W	100W	150W	250W	350W	400W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	99*82*30	129*98*30	159*98*30	159*98*30	217*116*30	217*116*30

Slim Nonwaterproof Power Supply 细长不防水电源

- Features:  
 1.Constant voltage design,aluminum housing GW series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality

- 产品特点:  
 1.恒压输出铝壳GW系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命



产品型号 Model No.	GW-60	GW-100	GW-150	GW-200	GW-250	GW-400
输入电压 Input Voltage	100-240Vac	100-240Vac	100-240Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	5A/2.5A	8.3A/4.16A	12.5A/6.25A	16.6A/8.3A	20.8A/10.4A	33.3A/16.6A
输出功率 Output Power	60W	100W	150W	200W	250W	400W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension(mm)	170*35*23	145*49*29	195*49*29	195*49*29	257*49*29	245*63*29

LED Power Adapter 电源适配器

- Features:  
 1.Constant voltage design,plastic housing G-AD series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality  
 5. White color can do

- 产品特点:  
 1.恒压输出塑胶壳G-AD系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命  
 5.白色也可做



产品型号 Model No.	G-AD12V1A	G-AD12V1.5A	G-AD12V2A	G-AD24V1A
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12Vdc	12Vdc	12Vdc	24Vdc
输出电流 Output Current	1A	1.5A	2A	1A
输出功率 Output Power	12W	18W	24W	24W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C




产品型号 Model No.	G-AD12V2A-1	G-AD12V3A	G-AD12V4A	G-AD12V5A	G-AD12V6A
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc
输出电流 Output Current	2A	3A	4A	5A	6A
输出功率 Output Power	24W	36W	48W	60W	60W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C



产品型号 Model No.	G-AD12V8A	G-AD12V10A	G-AD24V2A	G-AD24V3A	G-AD24V4A	G-AD24V5A
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12Vdc	12Vdc	24Vdc	24Vdc	24Vdc	24Vdc
输出电流 Output Current	8A	10A	2A	3A	4A	5A
输出功率 Output Power	96W	120W	48W	72W	96W	120W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C

适配器插头标准: 国标, 欧标, 美标, 英标等. 我司常规配用插头为欧规, DC公头插头直径5.5\*2.5mm和5.5\*2.1mm.  
 LED power adapter plugs standard: Chinese, European, American, and UK etc.  
 Our normal plug is european, the diameter of dc male plug is 5.5\*2.5mm & 5.5\*2.1mm.

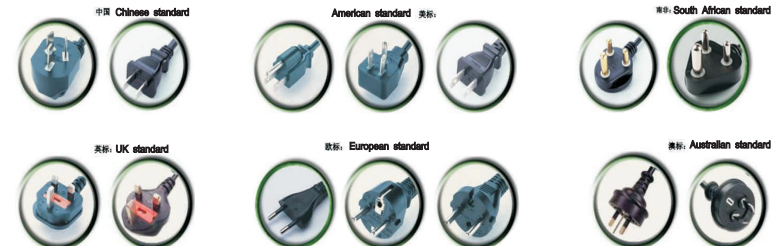

### Waterproof Power Supply 防水电源

**Features:**

1. Constant voltage design, aluminum housing F series
2. Protections: Short Circuit/Over Load/Over Current
3. 100% full load burn-in test
4. High reliable quality
5. Fully sealed waterproof: IP67

**产品特点:**

1. 恒压输出铝壳F系列
2. 保护功能: 短路/过载/过流保护
3. 100%满载老化
4. 高可靠性, 长寿命
5. 全密封防水IP67



产品型号 Model No.	F-25	F-30	F-40	F-60	F-75	F-100
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	2.08A/1.04A	2.5A/1.25A	3.3A/1.66A	5A/2.5A	6.25A/3.1A	8.3A/4.16A
输出功率 Output Power	25W	30W	40W	60W	75W	100W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	140*30*20	140*30*20	140*30*20	180*40*23	180*40*23	208*43.6*35.2

产品型号 Model No.	F-150	F-200	F-250	F-300	F-400	F-600
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	12.5A/6.25A	16.6A/8.3A	20.8A/10.4A	25A/12.5A	33.3A/16.6A	50A/25A
输出功率 Output Power	150W	200W	250W	300W	400W	600W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	215*71*35	215*71*35	263*91*37	263*91*37	263*91*37	295*124*40

### Mini Size Waterproof Power Supply 迷你防水电源

**Features:**

1. Constant voltage design, aluminum housing M series
2. Protections: Short Circuit/Over Load/Over Current
3. 100% full load burn-in test
4. High reliable quality
5. Fully sealed waterproof: IP67



**产品特点:**

1. 恒压输出铝壳M系列
2. 保护功能: 短路/过载/过流保护
3. 100%满载老化
4. 高可靠性, 长寿命
5. 全密封防水IP67



产品型号 Model No.	M-15	M-25	M-36	M-50	M-60	M-80	M-100	M-120
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.25A/0.6A	2.08A/1.04A	3A/1.5A	4.16A/2.08A	5A/2.5A	6.6A/3.3A	8.3A/4.16A	10A/5A
输出功率 Output Power	15W	25W	36W	50W	60W	80W	100W	120W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	100*30*20	100*30*20	140*30*20	140*30*20	140*30*20	250*30*20	140*30*20	250*30*20

### Waterproof Power Supply 防水电源


**Features:**

1. Constant voltage design, aluminum housing F-M series
2. Protections: Short Circuit/Over Load/Over Current
3. 100% full load burn-in test
4. High reliable quality
5. Fully sealed waterproof: IP67



**产品特点:**

1. 恒压输出铝壳F-M系列
2. 保护功能: 短路/过载/过流保护
3. 100%满载老化
4. 高可靠性, 长寿命
5. 全密封防水IP67

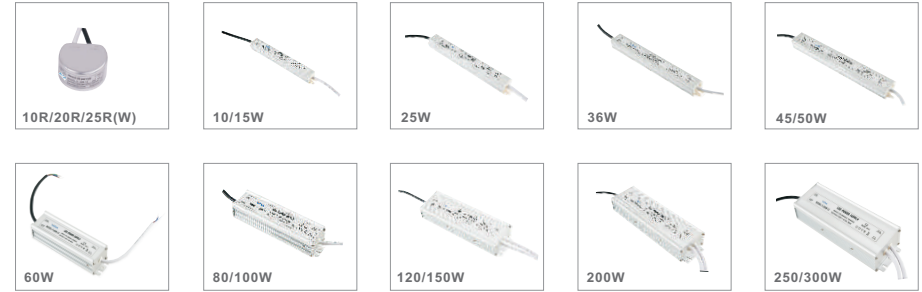

产品型号 Model No.	F-10R	F-20R	F-25R	F-10m	F-15m	F-25m
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	2.08A/1.04A	2.5A/1.25A	3.3A/1.66A	5A/2.5A	6.25A/3.1A	8.3A/4.16A
输出功率 Output Power	10W	20W	25W	10W	15W	25W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	58*58*23	58*58*23	58*58*23	172*21*20	172*21*20	182*21*20

产品型号 Model No.	F-36m	F-45m	F-50m	F-60m	F-80m	F-100m
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	12.5A/6.25A	16.6A/8.3A	20.8A/10.4A	25A/12.5A	33.3A/16.6A	50A/25A
输出功率 Output Power	36W	45W	50W	60W	80W	100W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	191*30.5*20.5	211*30.5*20.5	211*30.5*20.5	157*43.6*35.2	177*43.6*35.2	177*43.6*35.2

产品型号 Model No.	F-120m	F-150m	F-200m	F-250m	F-300m
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	12.5A/6.25A	16.6A/8.3A	20.8A/10.4A	25A/12.5A	33.3A/16.6A
输出功率 Output Power	120W	150W	200W	250W	300W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30~50°C	-30~50°C	-30~50°C	-30~50°C	-30~50°C
产品尺寸 Dimension (mm)	225*67.7*42.7	225*67.7*42.7	235*67.7*42.7	230*120*58	230*120*58

Ultra Slim Waterproof Power Supply 超薄防水电源

- Features:  
 1.Constant voltage design,aluminum housing FLB series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality  
 5. Fully sealed waterproof:IP67



- 产品特点:  
 1.恒压输出铝壳FLB系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命  
 5.全密封防水IP67



产品型号 Model No.	FLB-18	FLB-24	FLB-36	FLB-48	FLB-60	FLB-72
输入电压 Input Voltage	90-265Vac	90-265Vac	90-265Vac	90-265Vac	90-265Vac	90-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.5A/0.75A	2A/1A	3A/1.5A	4A/2A	5A/2.5A	6A/3A
输出功率 Output Power	18W	24W	36W	48W	60W	72W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C
产品尺寸 Dimension(mm)	173*20*22	268*20*22	288*20*22	288*20*22	323*20*22	323*20*22

Plastic Housing Waterproof Power Supply 塑胶壳防水电源

- Features:  
 1.Constant voltage design,plastic housing F-S series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality  
 5. Fully sealed waterproof:IP67



- 产品特点:  
 1.恒压输出塑胶壳F-S系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命  
 5.全密封防水IP67





产品型号 Model No.	F-S20	F-S35	F-S50	F-S60	F-S75	F-S100
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.66A/0.83A	2.9A/1.46A	4.16A/2.08A	5A/2.5A	6.25A/3.1A	8.3A/4.16A
输出功率 Output Power	20W	35W	50W	60W	75W	100W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C
产品尺寸 Dimension(mm)	141*30*21	120*34*26	148*40*30	167*42*34	167*42*34	192*52*37

Cabinet Lamp Power Supply (衣) 橱柜灯电源

- Features:  
 1.Constant voltage design,plastic housing CP series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality



- 产品特点:  
 1.恒压输出塑胶壳CP系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命

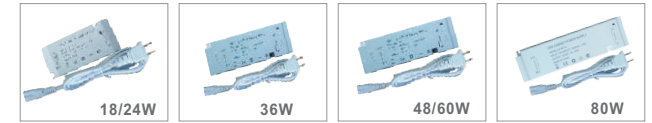

产品型号 Model No.	CP-18	CP-24	CP-36	CP-48	CP-60	CP-80
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.5A/0.75A	2A/1A	3A/1.5A	4A/2A	5A/2.5A	6.6A/3.3A
输出功率 Output Power	18W	24W	36W	48W	60W	80W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C
产品尺寸 Dimension (mm)	118*52*18	118*52*18	140*30*20	168*60*20	168*60*20	198*60*20

Ultrathin Cabinet Power Supply 超薄(衣)橱柜灯电源

- Features:  
 1.Constant voltage design,aluminum housing LF series  
 2.Protections: Short Circuit/Over Load/Over Current  
 3.100%full load burn-in test  
 4. High reliable quality



- 产品特点:  
 1.恒压输出铝壳LF系列  
 2.保护功能:短路/过载/过流保护  
 3.100%满载老化  
 4.高可靠性,长寿命



产品型号 Model No.	LF-ZL18	LF-ZL24	LF-ZL36	LF-ZL48	LF-ZL60	LF-ZL72
输入电压 Input Voltage	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac	175-265Vac
输入频率 Input Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz	47-63Hz
输出电压 Output Voltage	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc	12V/24Vdc
输出电流 Output Current	1.5A/0.75A	2A/1A	3A/1.5A	4A/2A	5A/2.5A	6A/3A
输出功率 Output Power	18W	24W	36W	48W	60W	72W
转换效率 Conversion Efficiency	>83%	>83%	>83%	>83%	>83%	>83%
工作环境 Working Temperature	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C	-30-50°C
产品尺寸 Dimension (mm)	235*18*18	235*18*18	350*18*18	350*18*18	385*18*18	460*18*18